



## SRL SWIVEL ROOF ANCHOR

022-4084

# INCREASE USER MOBILITY

**Smart cradle with 360° swivel fits most SRLs without anchor disassembly**

- **ANCHOR POST FOR QUICK SRL ATTACHMENT**  
Attach SRL to post without removing anything
- **VERSATILE D-RING CONNECTION POINT**  
Use with energy absorbing lanyards, VLLs & HLLs
- **EASY INSTALLATION ON METAL OR WOOD**  
Use on Z-purlin, metal decking or wood roof structures
- **PRACTICAL SMART CRADLE DESIGN**  
Accommodates most SRL shapes & sizes
- **FULL RANGE OF MOTION FOR MAX EFFICIENCY**  
360° swivel base gives worker freedom of movement

### Z-PURLIN



### METAL




### WOOD





Quick SRL attachment –  
no disassembly

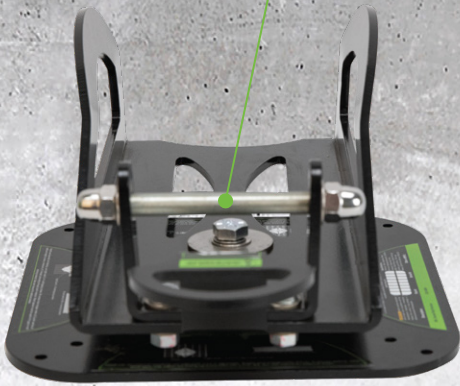

022-4084



Versatile D-ring  
connection



360° base rotation



Smart cradle  
fits most SRLs

- Temporary and reusable for cost efficiency
- For flat or pitched roof use
- Includes (8) lag screws for wood and (16) self-tapping screws for metal



**KEY SPECS:**

Materials: Powder coated steel, stainless steel  
 Weight: 18.2 lbs. (8.3 kg)  
 Size: 19" long, 10" x 10" base plate  
 Minimum Breaking Strength: 5,000 lbs.  
 ANSI Weight Capacity: 130-310 lbs. (59-141 kg)  
 OSHA Weight Capacity: Up to 420 lbs. (191 kg)  
 OSHA Standards: 1910.140, 1926.502

**INDUSTRY USE:**

- Solar Installation & Maintenance
- Residential Roofing
- Commercial Roofing
- General Industry

