



STRUT ANCHOR
022-4089

USER FRIENDLY

ONE PIECE DESIGN
for quick and easy
one-handed installation


- **1-PIECE ANCHOR – NO LOOSE PIECES**
Interlocking, fastened plates avoid losing or dropping parts
- **SIMPLE TO INSTALL WITH JUST ONE HAND**
Slide into strut, lock in place, add carabiner (included)
- **VISUAL INDICATOR FOR PROPER INSTALLATION**
Clearly visible red stripes warn if not seated correctly
- **SMOOTH SLIDING ACTION IS HANDS-FREE**
Anchor follows worker horizontally along strut
- **LIGHTWEIGHT, COMPACT AND REUSABLE**
Designed and built for maximum cost efficiency

1-piece anchor
installs with
one hand




- Compatible with standard 1-5/8", 12 gauge or thicker strut channel
- For overhead use only in a pre-installed, closed strut system

Fastened,
interlocking
plates avoids
loose parts

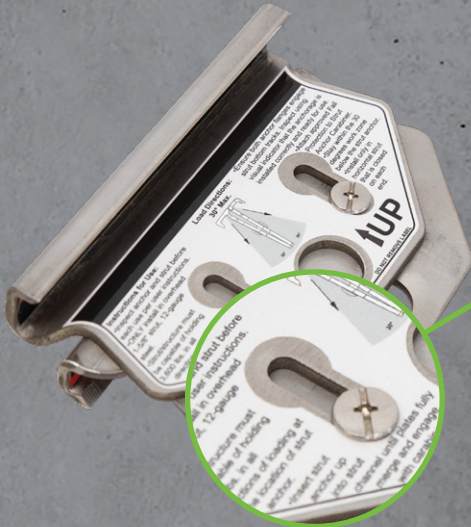

Red warning
stripe for proper
installation

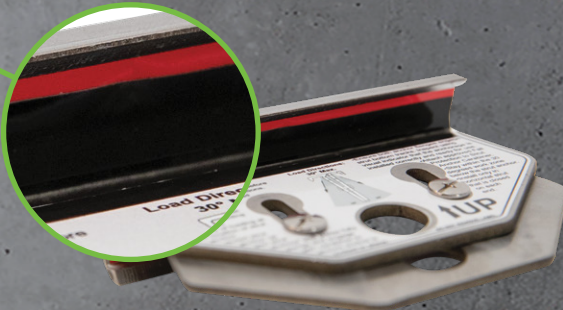

INDUSTRY USE:

- Concrete Construction
- Steel Erection
- Electric/HVAC/Mechanical
- General Industry
- Utilities, Oil & Gas
- Painting & Drywall

Carabiner
included



KEY SPECS:

Materials: Stainless steel anchor, YCM steel carabiner
Weight: 1.25 lbs. (0.6 kg)
Minimum Breaking Strength: 3,600 lbs.
ANSI Weight Capacity: 130-310 lbs. (59-141 kg)
OSHA Weight Capacity: Up to 420 lbs. (191 kg)
OSHA Standards: 1910.140, 1926.502

