



022-4092

TileLink Anchor (Screws)

FEATURES :

- Unique profile is designed to install under roof tiles with only the connection point exposed
- Temporary or permanent installation into wooden truss
- Built-in energy absorber reduces stress or damage to the mounting structure
- Installs with (5) 14 gauge 55mm hex head screws with seal (included)
- Suitable for roofs with pitch up to 7/12
- Not for use for material lifting, rappelling/rope access, or HLL systems

MINIMUM BREAKING STRENGTH (MBS) :


- 3,600 lbs. (16 kN)

FALL ARREST POINT(S) :

- 1 Formed Loop

ITEM WEIGHT :

- 1.6 lbs. (0.7 kg)

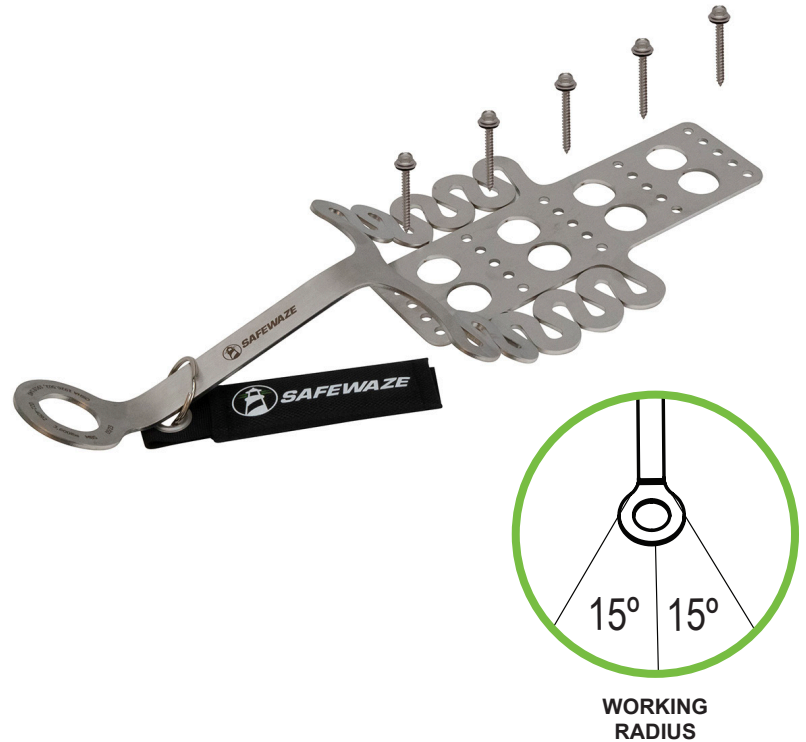

USER WEIGHT CAPACITY	
ANSI	130-310 lbs. (59-141 kg)
OSHA	N/A

STANDARD COMPLIANT WITH	
ANSI	N/A
OSHA	1910.140, 1926.502, 1910.66

RELATED PRODUCTS	
022-4094	TileLink Anchor (Rivets)
019-4005	FrogLink Temporary Roof Anchor
019-4006	FrogLink Permanent Roof Anchor with Rivets
020-16001	Replacement Rivets
019-21001	Hand Rivet Tool

COMPONENT	MATERIAL SPECIFICATION
Anchor Plate	Stainless steel
Screws	Galvanized steel