

POWERFUL HOLD

for confidence
to work

REMOVABLE CONCRETE ANCHOR **STRONGER**

Rock solid durability with minimum breaking strength up to 10,000 lbs.

FASTER

Trusted, reliable design for quick installation and rapid release when needed

SIMPLER

Smooth one-handed operation for maximum efficiency

HANDIER

Compact and reusable in a variety of applications

QUICK RELEASE


for freedom
to move



**REMOVABLE
CONCRETE
ANCHOR**
022-4085



- Durable steel cap**
Optional hammer assisted removal
- Corrosion-resistant**
Rugged stainless-steel construction
- Easy, one-handed trigger**
Rapid release for efficient repeated use
- 360° swivel connection**
Increased mobility and productivity
- Extreme versatility**
Reusable for horizontal, vertical and overhead use
- Smart engineering**
Wedge design expands to ensure a secure hold
- Protective label cover**
Maintains long-term compliance

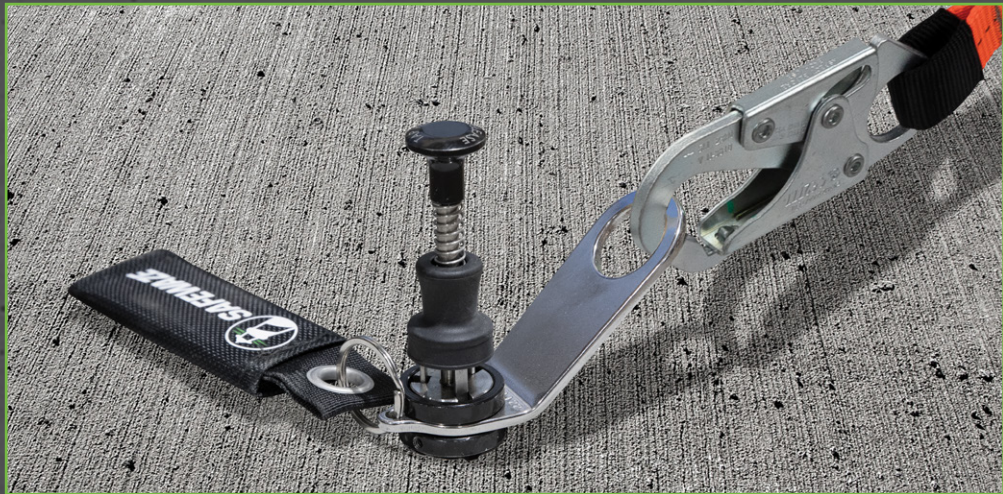

KEY SPECS:

Materials: Stainless steel body and D-ring, plated steel cap, nylon trigger, polyester label cover
Overall Length: 6.5" (165 mm)
Hole Size: 3/4" x 3" drilled
Minimum Breaking Strength: (installed in reinforced concrete)
• 5,000 lbs. (3,000 PSI concrete)
• 10,000 lbs. (4,000 PSI or higher concrete)
Working Load Limit: 1,800 lbs. (4,000 PSI or higher concrete)
Weight Capacity: ANSI 130-310 lbs., OSHA 420 lbs.
ANSI Standards: Z359.18-2017 Type T
OSHA Standards: 1926.502, 1910.140, 1910.66

