


### FS88595

6' Stretch Low-Profile Shock Lanyard  
w/ Rebar Hook



<b>Features and Benefits</b>	Fall arrest lanyard with one rebar hook (connects to anchor point) and one snap hook (connects to harness D-ring). Stretch Tubular webbing allows for maneuverability. Rebar hook designed to fit Symons Form.
<b>Length</b>	4 ft (1.22 m) to 6 ft (1.83 m)
<b>Weight</b>	3.4 lbs (1.54 kg)
<b>Weight Capacity</b>	310 lbs (140.61 kg)
<b>Attachment Point(s)</b>	1 Snap hook - 1 Rebar hook
<b>Materials</b>	1-3/8" (34.93 mm) Stretch Tubular Web High-strength polyester stitching Stamped steel snap hook and rebar hook, each: 3,600 lbs Gate-rated; Min breaking strength > 5,000 lbs
<b>Applicable Standards</b>	Meets OSHA 1926.502 - ANSI Z359.13 - ANSI A10.32

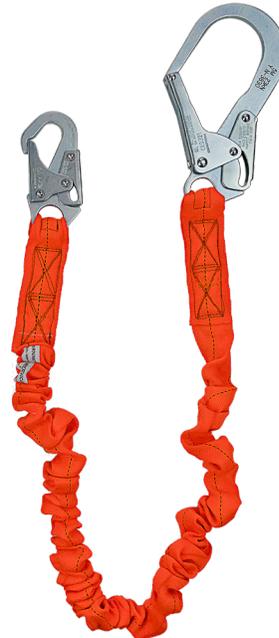