


## FS88590

6' Stretch Low-Profile Shock Lanyard  
w/ Double-Locking Snap Hooks



<b>Features and Benefits</b>	Fall arrest lanyard with two snap hooks—one attaches to anchor point, and one attaches to harness D-ring. Stretch Tubular webbing allows for maneuverability.
<b>Length</b>	4 ft (1.22 m) to 6 ft (1.83 m)
<b>Weight</b>	2.5 lbs (1.13 kg)
<b>Weight Capacity</b>	310 lbs (140.61 kg)
<b>Attachment Point(s)</b>	2 Snap hooks
<b>Materials</b>	1-3/8" (34.93 mm) Stretch Tubular Web High-strength polyester stitching Stamped steel snap hooks: 3,600 lbs Gate-rated; Min breaking strength > 5,000 lbs
<b>Applicable Standards</b>	Meets OSHA 1926.502 - ANSI Z359.13 - ANSI A10.32

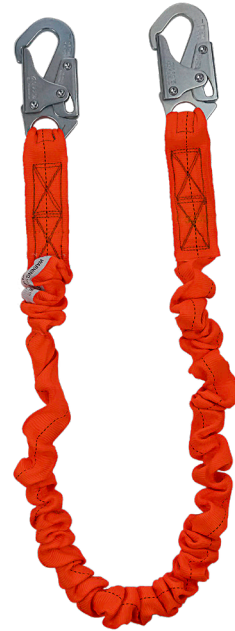